


SPD-7 USPD 22 liter dual inverted cup trap

Dual E2M28 + Sogevac + Diffusion

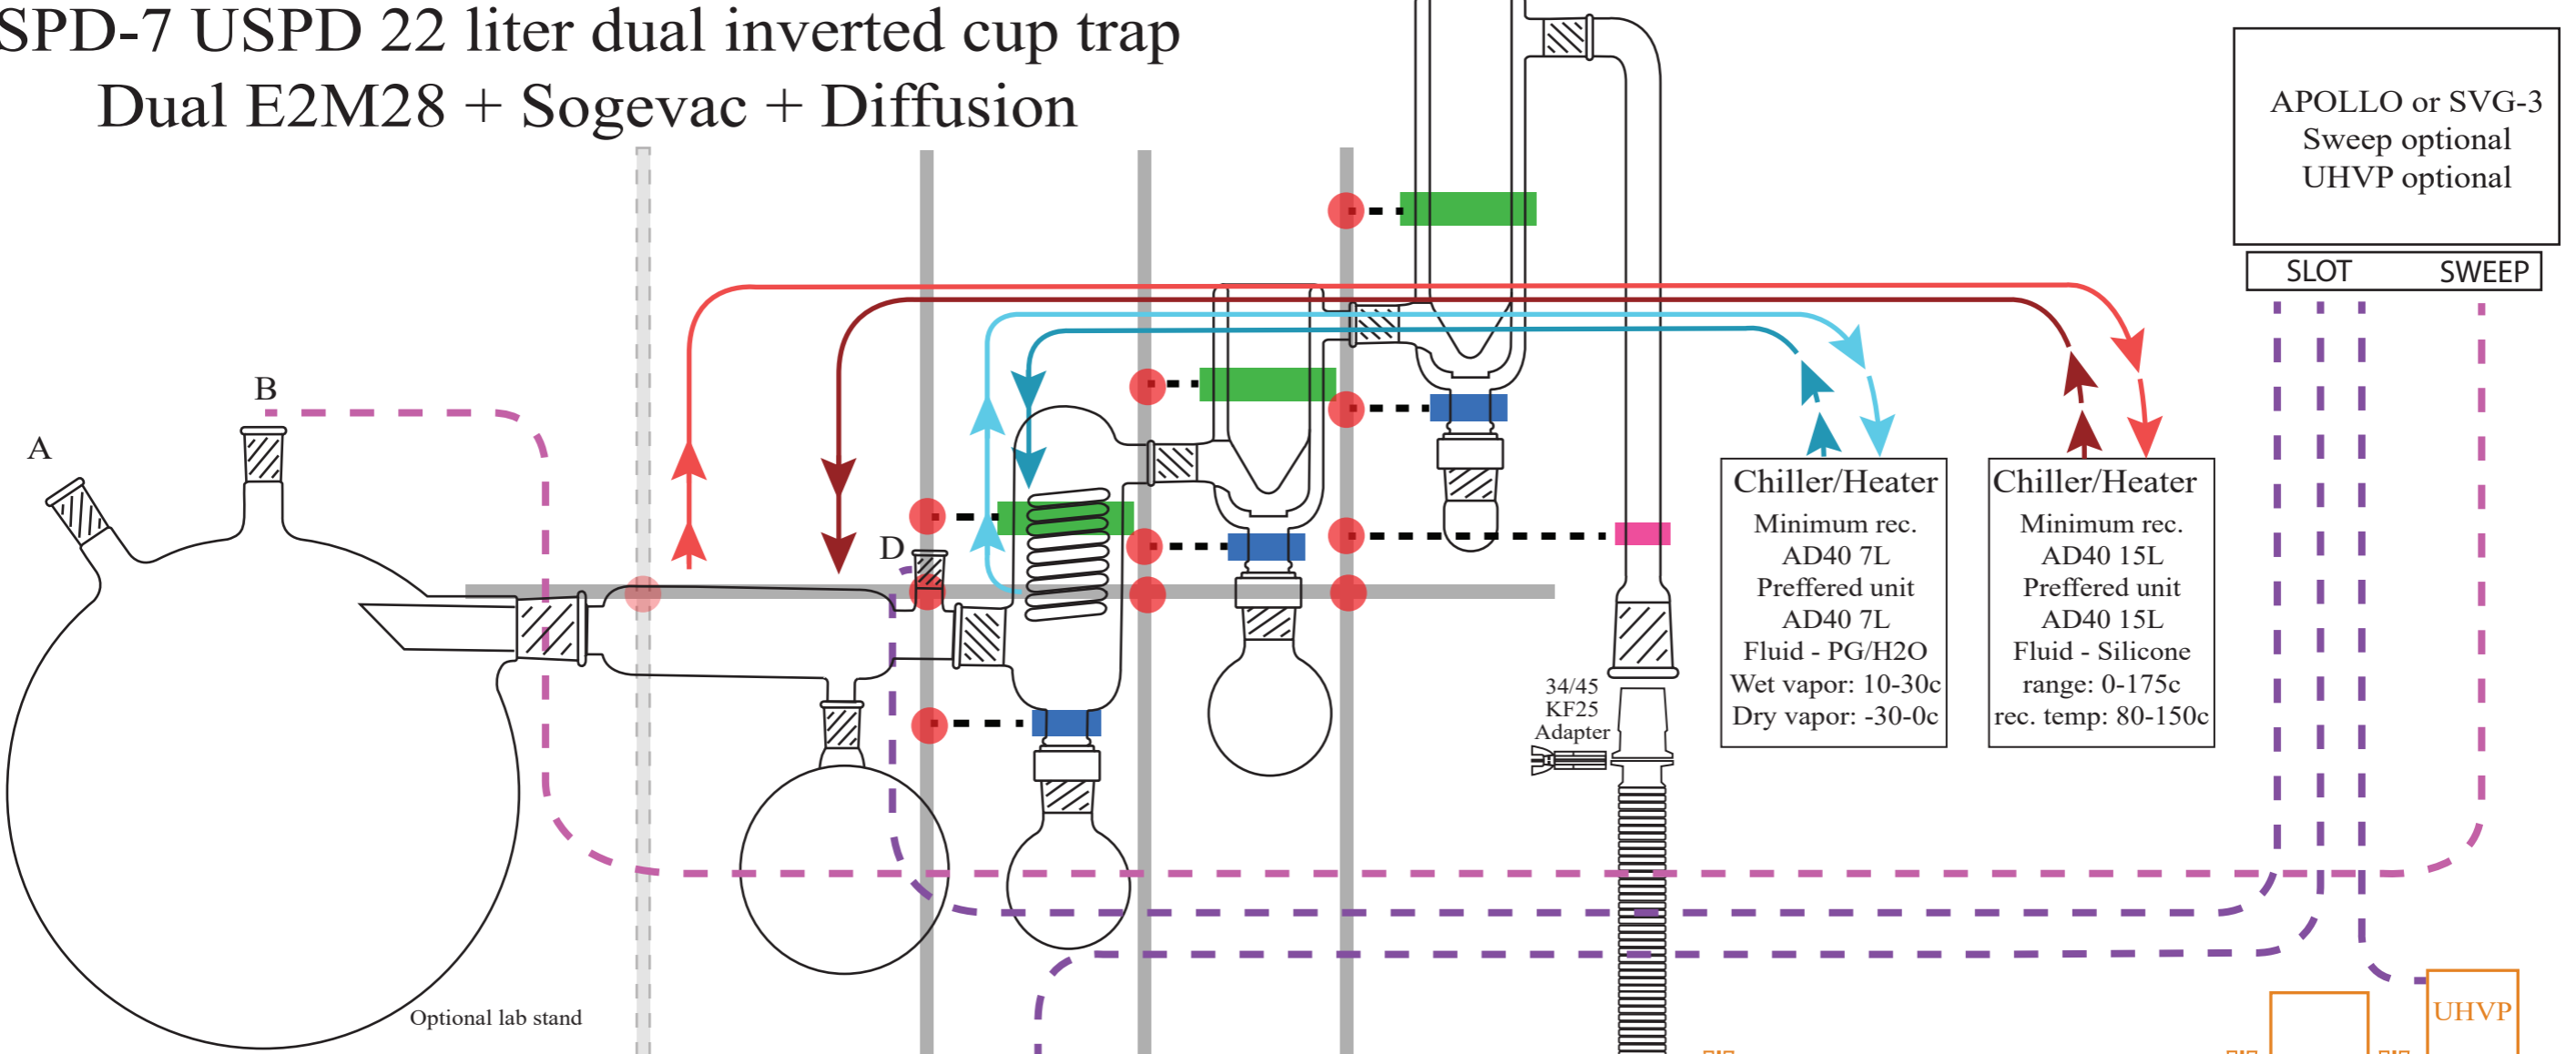

APOLLO or SVG-3
Sweep optional
UHVP optional

SLOT	SWEEP
------	-------

Chiller/Heater
Minimum rec.
AD40 7L
Preffered unit
AD40 7L
Fluid - PG/H2O
Wet vapor: 10-30c
Dry vapor: -30-0c

Chiller/Heater
Minimum rec.
AD40 15L
Preffered unit
AD40 15L
Fluid - Silicone
range: 0-175c
rec. temp: 80-150c

- Image key + required supports
warranty void if not supported properly
- Clamp + o-ring
 - Cork Clamp
 - XL Fork Clamp
 - Chain Clamp
 - A** Thermometer adapter or thermowell
 - B** 24/40 Stopper or Apollo sweep valve
 - D** Vacuum sensor port
24/40 Stopper or
24/40 x KF25 adapter or
24/40 x GL14 adapter
 - Required cross clamp
 - Required stand base
 - Required lab rods
 - Optional diffusion setup

