


SPD-7.1 USPD 5 liter dual inverted cup trap

Dual E2M28 + Sogevac + Diffusion





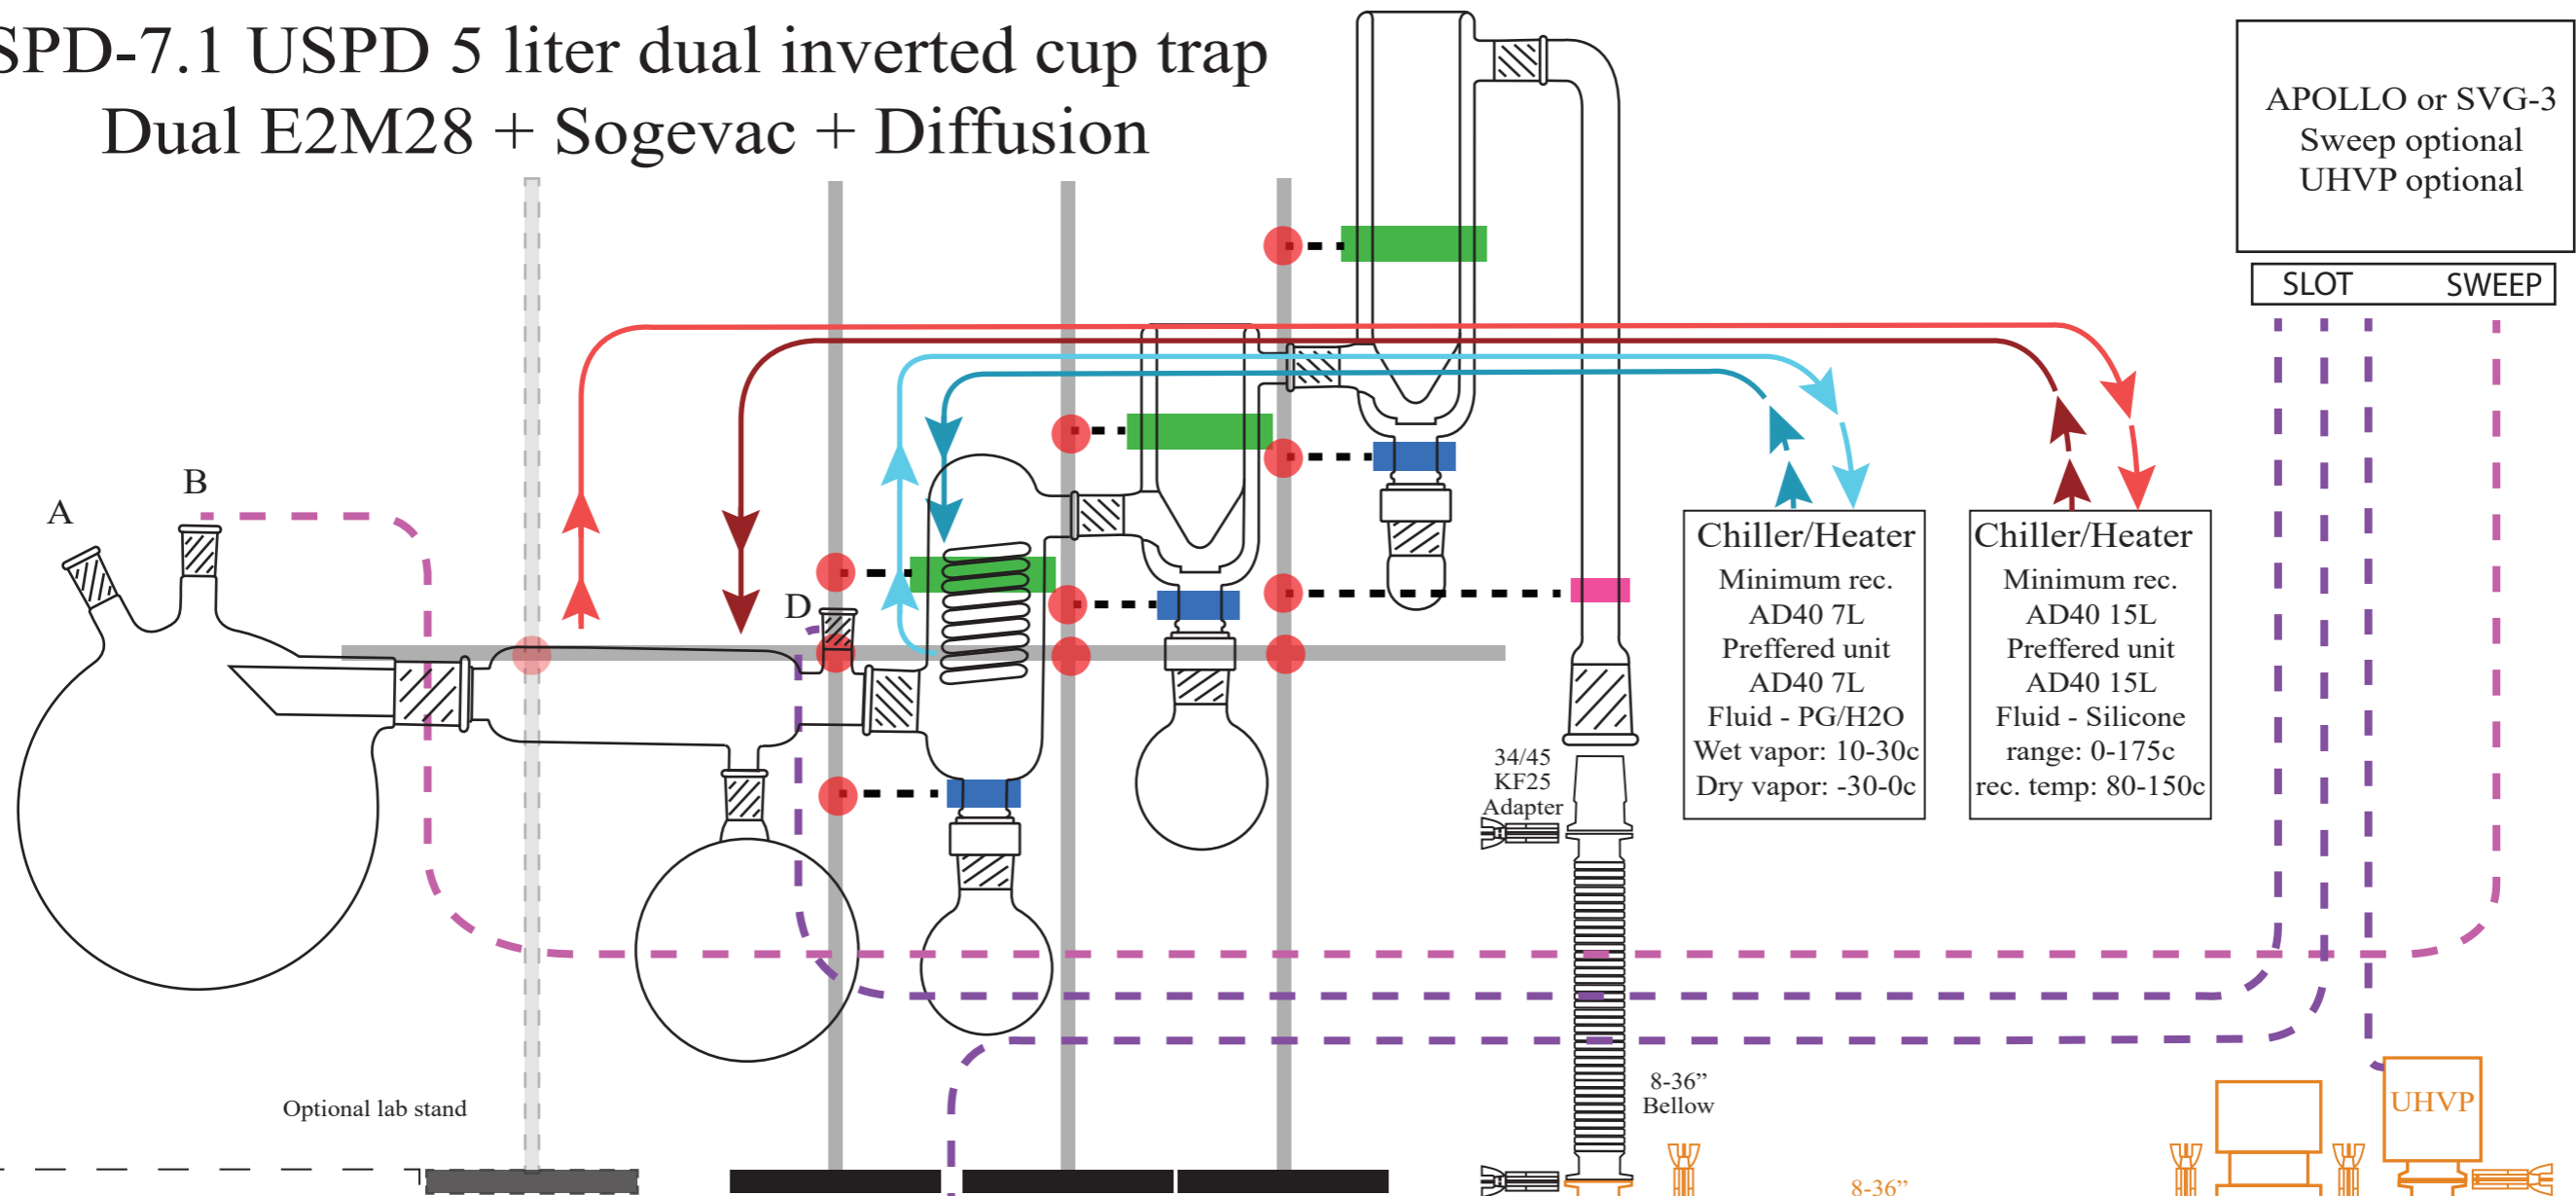





APOLLO or SVG-3
Sweep optional
UHVP optional

Chiller/Heater
Minimum rec. AD40 7L
Preferred unit AD40 7L
Fluid - PG/H2O
Wet vapor: 10-30c
Dry vapor: -30-0c

Chiller/Heater
Minimum rec. AD40 15L
Preferred unit AD40 15L
Fluid - Silicone
range: 0-175c
rec. temp: 80-150c

Optional lab stand

Image key + required supports
warranty void if not supported properly

-  Clamp + o-ring
-  Cork Clamp
-  XL Fork Clamp
-  Chain Clamp
- A** Thermometer adapter or thermowell
- B** 24/40 Stopper or Apollo sweep valve
- D** Vacuum sensor port 24/40 Stopper or 24/40 x KF25 adapter or 24/40 x GL14 adapter
-  Required cross clamp
-  Required stand base
-  Required lab rods
-  Optional diffusion setup

